


**THE FEATURES OF THE OLYMPIC OLYLOG® INCLUDE:**

- INSTALL MUCH FASTER AND EASIER THAN LAGS AND SPIKES
  - SAVES TIME AND FATIGUE
  - DRAMATICALLY LOWERS INSTALLED COST
- REQUIRES NO PREDRILLING
  - ELIMINATES ON-SITE PREDRILLING
  - ELIMINATES MANUFACTURING DRILL STATIONS
- COUNTERSINKS INTO LOG
  - ALLOWS LOG TO SETTLE NATURALLY
- DRAWS WARPED LOGS DOWN
- REMOVABLE AND REUSABLE
- ELIMINATES JARRING AND DAMAGE CAUSED BY A SLEDGE HAMMER
- ENGINEERED FOR INCREASED STRENGTH AND PERFORMANCE:
  - AVERAGE ULTIMATE SHINGLE SHEAR = 3152 LBS
  - AVERAGE OLYLOG PULLOUT STRENGTH = 1450 LBS
    - STRAIGHT SHANK SPIKE = 345 LBS
    - SPIRAL SHANK SPIKE = 425 LBS

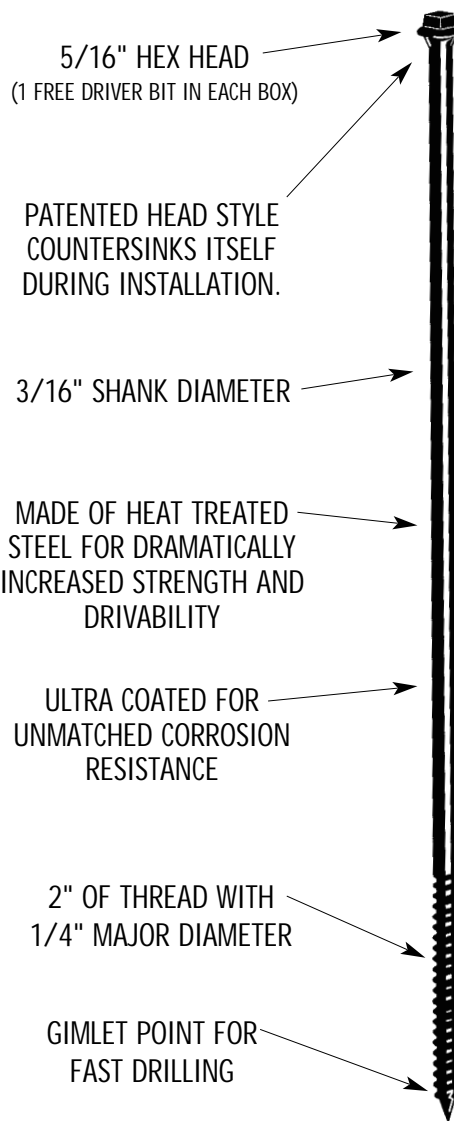

PHYSICAL DATA	Cat. No.	Length	Thread Length	Packaging*	Weight
Thread Diameter: .245	<b>LOG04</b>	<b>4"</b>	<b>2"</b>	<b>250</b>	<b>10 lb</b>
Shank Diameter: .190	<b>LOG06</b>	<b>6"</b>	<b>2"</b>	<b>250</b>	<b>14 lb</b>
Head Style: Hex Head	<b>LOG08</b>	<b>8"</b>	<b>2"</b>	<b>250</b>	<b>18 lb</b>
	<b>LOG09</b>	<b>9"</b>	<b>2"</b>	<b>250</b>	<b>20 lb</b>
	<b>LOG10</b>	<b>10"</b>	<b>2"</b>	<b>250</b>	<b>23 lb</b>
	<b>LOG12</b>	<b>12"</b>	<b>2"</b>	<b>250</b>	<b>25 lb</b>
	<b>LOG14</b>	<b>14"</b>	<b>2"</b>	<b>250</b>	<b>29 lb</b>
	<b>LOG16</b>	<b>16"</b>	<b>2"</b>	<b>250</b>	<b>36 lb</b>

\*Indicates quantity per case. One special hex head driver bit is included in each box (SPD17).

**INSTALLATION INSTRUCTIONS**

- USE A 1/2", HIGH TORQUE DRILL @ 450 RPM'S.
- INSTALL OLYLOG PERPENDICULAR TO THE LOG.
- COUNTERSINK THE OLYLOG NO MORE THAN 1/2".

**OTHER OLYLOG USES**

- DOVETAIL ATTACHMENTS
- POST & BEAM CONSTRUCTION
- BEAMS AND RAFTERS
- AND MUCH MORE