
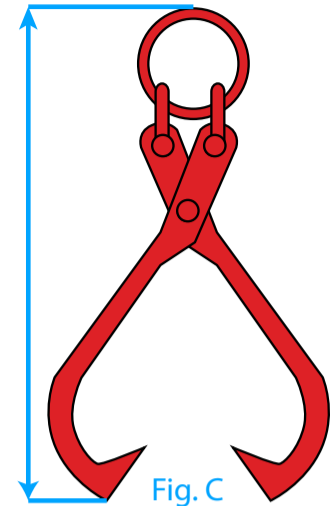
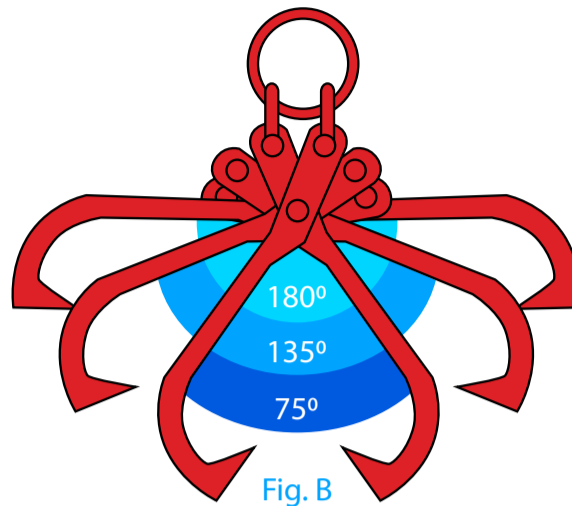


# LOAD RATED TONGS

CERTIFIED FOR OVERHEAD LIFTING

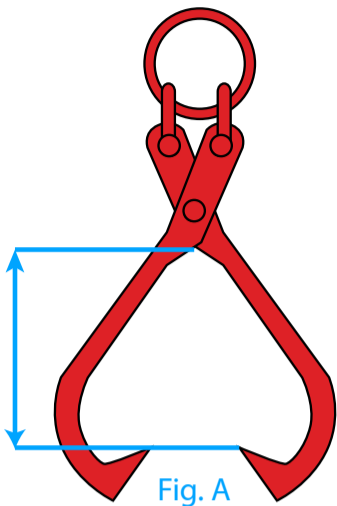

Size	Working Load Limit in lbs.	Degrees of Opening		
		180°	135°	75°
3/4" x 16"		750	1000	1500
1" x 20"		1500	2000	2500
1 x 25"		1500	2000	2500
1-1/4" x 32"		2000	2500	3000
1-1/2" x 36"		3000	4000	5000

Size of Tongs		3/4"	1"	1"	1-1/4"	1-1/2"
Lifting Area (Height) See Fig. A	75°	7"	9"	10"	14"	16"
	135°	5"	6-1/2"	7"	10"	11"
	180°	3-1/2"	4"	4"	6"	7"
Length of Jaw Opening See Fig. B	75°	3-1/2"	6"	7-1/2"	8-1/2"	12"
	135°	12"	17"	20"	27"	32"
	180°	16"	20"	25"	32"	36"
Closed - Height from Base to inside Top Ring. See Fig. C		18-3/4"	23-1/4"	25-1/4"	31"	37-3/4"
Size of Tong Shackle		3/8" Screw Pin	1/2" Bolt & Nut	1/2" Bolt & Nut	5/8" Bolt & Nut	3/4" Bolt & Nut
Size of Tong Rings		5/8"	3/4"	3/4"	7/8"	1"



## WARNING

DO NOT EXCEED MAXIMUM RATED CAPACITY



1-800-359-6614 [www.loghelp.com](http://www.loghelp.com)