


THE FEATURES OF THE OLYMPIC LOGHOG® INCLUDE:

- **OVERSIZED WASHER HEAD AND INCREASED THREAD COMBINE FOR DRAMATICALLY INCREASED PULL DOWN FOR WARPED AND TWISTED LOGS.**
- **INSTALLS MUCH FASTER AND EASIER THAN LAGS & SPIKES**
 - SAVES TIME AND FATIGUE
 - DRAMATICALLY LOWERS INSTALLED COST
- **REQUIRES NO PREDRILLING**
 - ELIMINATES ON-SITE PREDRILLING
 - ELIMINATES MANUFACTURING DRILL STATIONS
- **COUNTERSINKS INTO LOG**
 - ALLOWS LOG TO SETTLE NATURALLY
- **REMOVABLE AND REUSABLE**
- **ELIMINATES JARRING AND DAMAGE CAUSED BY A SLEDGE HAMMER**
- **ENGINEERED FOR INCREASED STRENGTH AND PERFORMANCE:**
 - AVERAGE ULTIMATE SHEAR STRENGTH=7054 LBS.
 - AVERAGE ULTIMATE TENSILE STRENGTH=4612 LBS.
 - AVERAGE LOGHOG PULLOUT STRENGTH=2761 LBS.
 - STRAIGHT SHANK SPIKE=345 LBS.
 - SPIRAL SHANK SPIKE=425 LBS.

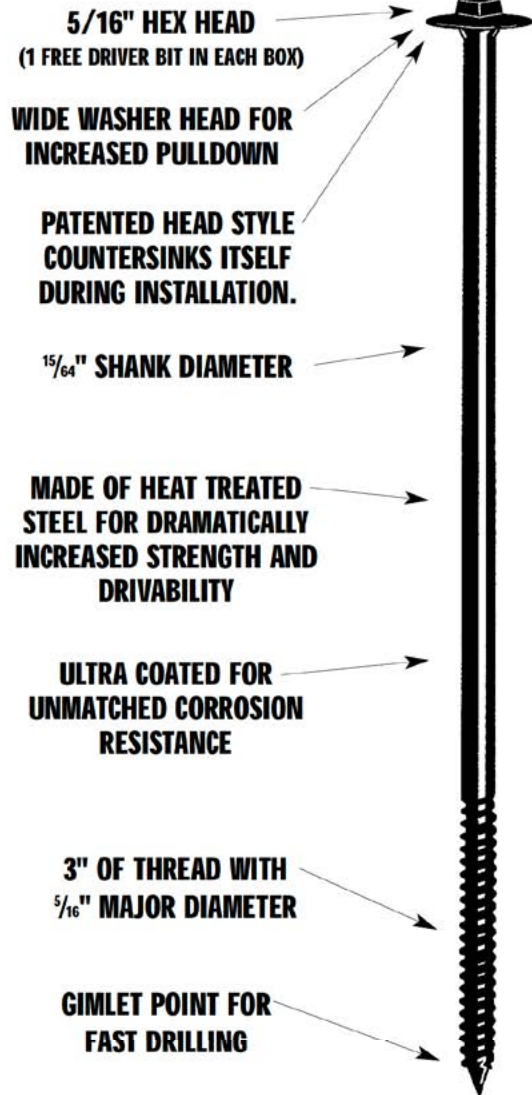

PHYSICAL DATA	Cat. No.	Length	Thread Length	Packaging*	Weight
Thread Diameter: .320	LHOG009-25	9"	3"	25	12 lb
Shank Diameter: .229	LHOG011-25	11"	3"	25	10 lb
Head Style: Hex Head	LHOG012-25	12"	3"	25	14 lb
	LHOG013-25	13"	3"	25	18 lb
	LHOG015-25	15"	3"	25	20 lb
*Indicates quantity per box. One special hex head driver bit and heavy duty washers in each box.	LHOG009	9"	3"	250	23 lb
**25 packs are packaged 4 per master carton.	LHOG011	11"	3"	250	25 lb
	LHOG012	12"	3"	250	29 lb
	LHOG013	13"	3"	250	29 lb
	LHOG015	15"	3"	150	28 lb

INSTALLATION INSTRUCTIONS

- USE A 1/2", HIGH TORQUE, LOW RPM DRILL.
- INSTALL LOGHOG PERPENDICULAR TO THE LOG.
- COUNTERSINK THE LOGHOG A MINIMUM OF 1/4".

OTHER LOGHOG USES

- DOVETAIL ATTACHMENTS
- POST & BEAM CONSTRUCTION
- BEAMS AND RAFTERS
- AND MUCH MORE

Distributed By:
Schroeder Log Home Supply, Inc.
 1-800-359-6614 www.loghelp.com